

## 4TF-40/4TF-50

### 材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: A、B、U12、U22、Q12、Q22
- 静止环 Stationary Ring: U1、U2、Q1、Q2
- 辅助密封 Auxiliary Seal: X、T1
- 波纹管 Bellows: G1、Y
- 其他结构件材料 Other Parts: G

### 介质 Medium

油、水、盐、制冷剂、有机溶剂及其它弱腐蚀性溶液。  
Oil, water, salt, cryogen, organic solvent and other weak corrosive fluid, etc.




CM 4TF-40

### 适用范围 Operating limits

- 压力 Pressure:  $\leq 2.0\text{MPa}$
- 温度 Temperature:  $-40\sim 200^\circ\text{C}$
- 线速度 Speeds:  $\leq 20\text{m/sec}$

### 用途 Applications

用于化工、石油化工、制冷、制药、造纸、给排水、污水等工业的泵类、压缩机等类似的旋转轴密封。  
Used in all types of rotating equipment, pumps and compressors, to suit industries such as general chemical, petrochemical, pharmaceutical, food processing, pulp and paper, and waste water treatment.

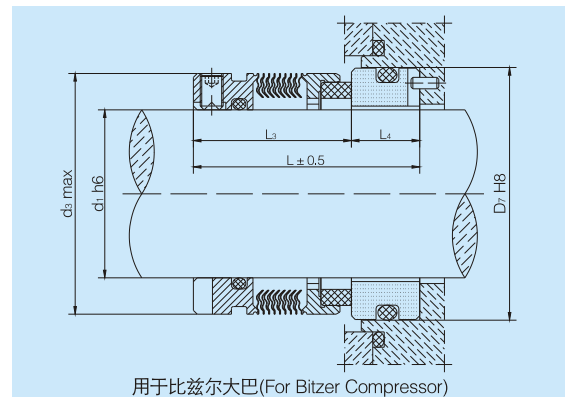

Model	d	d3	d7	L	L3	L4
4TF-50	50	65.10	69.85	47.5	34.0	13.5
4TF-40	40	55.55	60.35	45.0	33.1	11.9

## 4NFCY-40

### 材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: B、Q2
- 静止环 Stationary Ring: G、Q2
- 辅助密封 Auxiliary Seal: X
- 波簧 Super-Sinus spring: G、Y
- 其他结构件材料 Other Parts: D、E、F



4NFCY-40(old model)

### 适用范围 Operating limits

- 压力 Pressure:  $\leq 1.2\text{MPa}$
- 温度 Temperature:  $-30\sim 200^\circ\text{C}$
- 线速度 Speeds:  $\leq 10\text{m/sec}$

