

结构特点 Design features

- 内装、单端面、单弹簧、非平衡型、拨叉传动结构，抗堵塞能力强，任意旋向。
- Internally mounted, single face, single spring, unbalanced, by means of shifting fork drive, a stronger anti-blocking condition, any rotation direction.

适用范围 Operating limits


- 压力 Pressure: 0~0.6MPa
- 温度 Temperature: -20~80°C
- 线速度 Speeds: ≤ 14m/sec

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: U12、U22、Q22、V1
- 静止环 Stationary Ring: B、U12、U22、Q2、Q22
- 辅助密封 Auxiliary Seal: P、E、V、T1
- 弹簧及其他结构件材料 Spring and Other Parts: F、G

介质 Medium

油类、水、盐、非结晶性溶剂、有机溶剂及其它弱腐蚀性溶液。
Oil, water, salt, noncrystalline agent, organic solvents and other weak corrosive fluid.

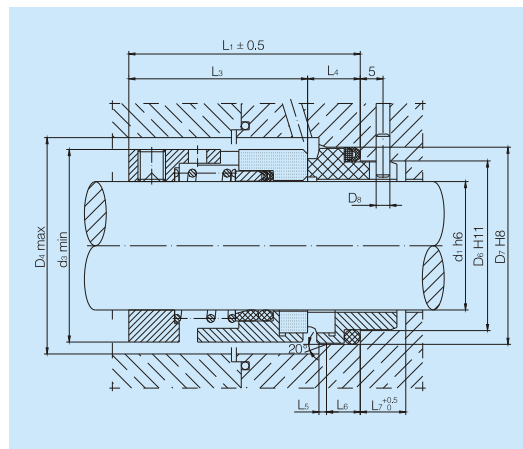

型号 Model	d ₁	d ₃	D ₄	D ₆	D ₇	d ₈	L ₁	L ₃	L ₄	L ₅	L ₆	L ₇
CN 106U-28	28	42	44	37	43	3	50	39	11	2.0	5	9
CN 106U-35	35	49	51	44	50	3	55	42	13	2.0	5	9
CN 106U-38	38	54	58	48	56	4	55	42	13	2.0	6	9
CN 106U-48	48	64	68	58	66	4	60	47	13	2.0	6	9
CN 106U-50	50	66	70	62	70	4	60	47	13	2.5	6	9
CN 106U-60	60	80	80	72	80	4	70	55	15	2.5	6	9