

结构特点 Design features

- 内装、单端面、单弹簧、非平衡型、拨叉传动结构，任意旋向，安装方便。
- Internally mounted, single face, single spring, unbalanced, by means of shifting fork drive, any rotation direction, it can be mounted conveniently.

材料 Materials(to DIN24960)


- 旋转环 Rotary Ring: U12、U22、Q22
- 静止环 Stationary Ring: B、U12、U22、Q2、Q22、V1
- 辅助密封 Auxiliary Seal: P、E、V、M1、T1
- 弹簧及其他结构件材料 Spring and Other Parts: G、G

适用范围 Operating limits

- 压力 Pressure: 0~1.0MPa
- 温度 Temperature: -20~180℃
- 线速度 Speeds: ≤10m/sec

介质 Medium

油类、水、盐、非结晶性溶剂、有机溶剂及其它弱腐蚀性溶液。
Oil, water, salt, noncrystalline agent, organic solvents and other weak corrosive fluid.

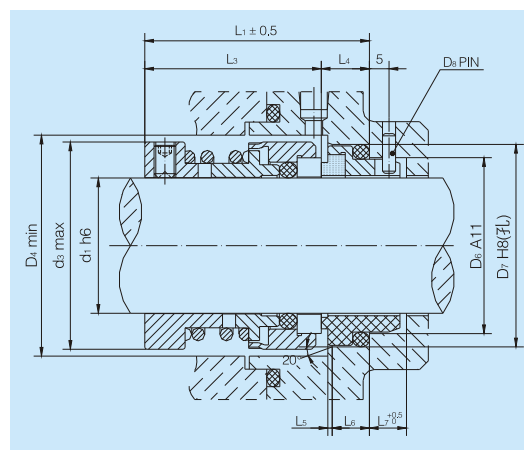

型号 Model	d1	d3	D4	D6	D7	d8	L1	L3	L4	L5	L6	L7
CN 112-18	18	32	34	27	33	3	40	30.0	10.0	2.0	5	9
CN 112-20	20	34	36	29	35	3	42	32.0	10.0	2.0	5	9
CN 112-25	25	39	41	34	40	3	50	39.5	10.5	2.0	5	9
CN 112-28	28	42	44	37	43	3	51	39.5	11.5	2.0	5	9
CN 112-30	30	44	46	39	45	3	55	43.5	11.5	2.0	5	9
CN 112-35	35	49	51	44	50	3	55	43.5	11.5	2.0	5	9
CN 112-40	40	56	60	51	58	4	65	52.0	13.0	2.0	6	9
CN 112-45	45	61	65	56	63	4	65	52.0	13.0	2.0	6	9
CN 112-50	50	66	70	62	70	4	70	56.0	14.0	2.5	6	9
CN 112-55	55	71	75	67	75	4	70	56.0	14.0	2.5	6	9
CN 112-60	60	80	85	72	80	4	75	61.0	14.0	2.5	6	9
CN 112-65	65	85	90	77	85	4	75	61.0	14.0	2.5	6	9
CN 112-70	70	90	95	83	92	4	80	63.5	16.5	2.5	7	9
CN 112-75	75	99	104	88	97	4	80	63.5	16.5	2.5	7	9
CN 112-80	80	104	109	95	105	4	85	68.5	16.5	3.0	7	9