

### 结构特点 Design features

- 内装、单端面、多弹簧、非平衡型、拨叉传动结构，任意旋向，压力均匀，结构紧凑，安装方便。
- Internally mounted, single face, multi-spring, unbalanced, by means of shifting fork drive, any rotation direction, it can be mounted conveniently.

### 材料 Materials(to DIN24960)


- 旋转环 Rotary Ring: U12、U22、Q22、V1
- 静止环 Stationary Ring: B、U12、U22、Q2、Q22、V1
- 辅助密封 Auxiliary Seal: P、E、V、M1、T1
- 弹簧及其他结构件材料 Spring and Other Parts: G、G

### 适用范围 Operating limits

- 压力 Pressure: 0~0.8MPa
- 温度 Temperature: -20~180℃
- 线速度 Speeds: ≤14m/sec

### 介质 Medium

油类、水、盐、非结晶性溶剂、有机溶剂及其它弱腐蚀性溶液。  
Oil, water, salt, noncrystalline agent, organic solvents and other weak corrosive fluid.

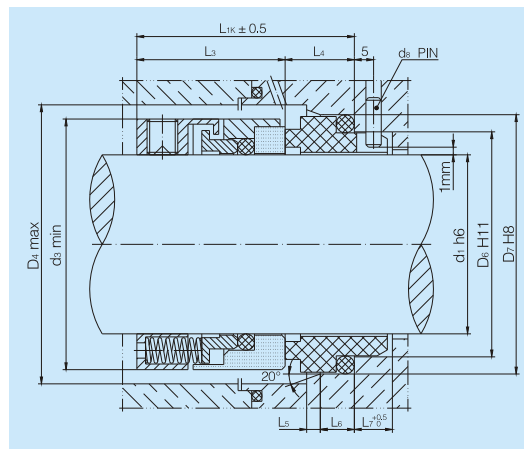

型号 Model	d1	d3	D4	D6	D7	d8	L1k	L3	L4	L5	L6	L7
CN 116U-35	35	49	51	44	50	3	42.5	29.0	13.5	3.0	5	9
CN 116U-45	45	61	65	55	63	4	45.0	31.5	13.5	3.0	6	9
CN 116U-50	50	66	70	62	70	4	47.5	34.0	13.5	2.5	6	9
CN 116U-55	55	71	75	67	75	4	47.5	34.0	13.5	2.5	6	9
CN 116U-60	60	80	85	72	80	4	52.5	38.0	14.5	2.5	6	9
CN 116U-65	65	85	90	77	85	4	52.5	37.0	15.5	2.5	6	9
CN 116U-70	70	90	95	83	92	4	60.0	44.0	16.0	2.5	7	9
CN 116U-80	80	104	109	95	105	4	60.0	43.5	16.5	3.0	7	9