

结构特点 Design features

- 外装、单端面、多弹簧、聚四氟乙烯波纹管结构；
- 非推进式密封，浮动性好，密封性可靠；
- 安装尺寸符合JB/T 7372-1994 标准。
- Externally mounted, single face, multi-spring, and driven by the pure PTFE bellows.
- Non-pusher structure, good fluctuate of compensation and reliable seal.
- Conform to the standard of JB/T 7372-1994.

材料 Materials(to DIN24960)


- 旋转环 Rotary Ring: Y1、Y2
- 静止环 Stationary Ring: V1、Q1、Q2
- 辅助密封 Auxiliary Seal: T1
- 弹簧及其他结构件材料 Spring and Other Parts: F、G

**适用范围 Operating limits**

- 压力 Pressure: 0~0.5MPa
- 温度 Temperature: 0~80°C
- 线速度 Speeds: ≤ 14m/sec

介质 Medium

强酸、强氧化剂和其它腐蚀性介质。
Strong acid, strong oxidant and other corrosive medium.

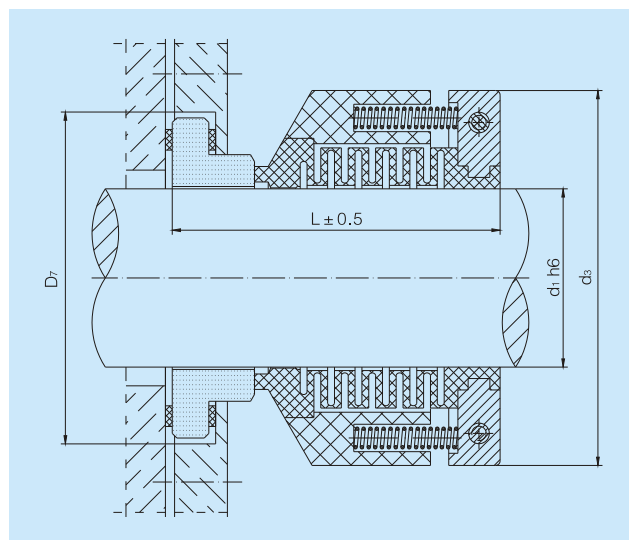

型号 Model	d1	ds	D7	L
CN 152-25	25	69	48	59
CN 152-30	30	75	53	59
CN 152-35	35	80	58	59
CN 152-40	40	85	63	59
CN 152-45	45	90	68	62
CN 152-50	50	95	73	62
CN 152-55	55	100	78	62
CN 152-60	60	105	83	62
CN 152-65	65	110	88	62
CN 152-70	70	115	93	62