

结构特点 Design features

- 单端面、单弹簧、非平衡型、橡胶波纹管结构；
- 动环靠橡胶波纹管的过盈量和弹簧座传动，波纹管免受扭力作用设计，传动可靠。
- 装配尺寸符合ISO3069标准和DIN24960标准。
- Single face, single spring, unbalanced, rubber bellows structure.
- The seal face is driven through the spring seat, rubber bellows design to avoid torsion.
- The installation size conforms to the standard for ISO3069 and DIN24960

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: B、U1、U2、Q1、Q2
- 静止环 Stationary Ring: U1、U2、Q1、Q2
- 辅助密封 Auxiliary Seal: P、X、E、V、M1、M2
- 弹簧及其他结构件材料 Spring and Other Parts: F、G




适用范围 Operating limits

- 压力 Pressure: ≤4.0MPa
- 温度 Temperature: -40~200℃
- 线速度 Speeds: ≤13m/sec

用途 Applications

适用于离心旋转泵、搅拌机、减速机、压缩机等类似的旋转设备。
Used in centrifugal pumps, mixer, compressors and other rotating equipments.

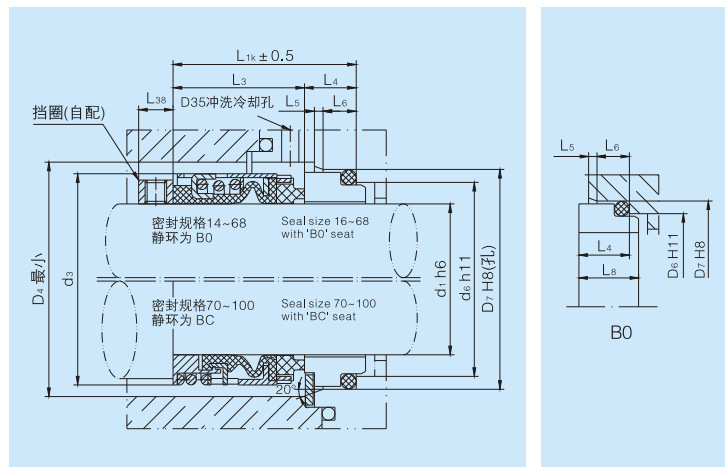

型号 Model	d1	d3	D4	D6	D7	D35	L1k	L3	L4	L5	L6	L8	L38
CN 502-14	14	24	26	21	25	6.5	35.0	23.0	12.0	1.5	4	12.5	5.0
CN 502-16	16	26	28	23	27	6.5	35.0	23.0	12.0	1.5	4	12.5	5.0
CN 502-18	18	32	34	27	33	6.5	37.5	24.0	13.5	2.0	5	14.5	7.5
CN 502-20	20	34	36	29	35	6.5	37.5	24.0	13.5	2.0	5	14.5	7.5
CN 502-22	22	36	38	31	37	6.5	37.5	24.0	13.5	2.0	5	14.5	7.5
CN 502-24	24	38	40	33	39	6.5	40.0	26.5	13.5	2.0	5	14.5	7.5
CN 502-25	25	39	41	34	40	6.5	40.0	27.0	13.0	2.0	5	14.0	7.5
CN 502-28	28	42	44	37	43	6.5	42.5	30.0	12.5	2.0	5	13.5	7.5
CN 502-30	30	44	46	39	45	6.5	42.5	30.5	12.0	2.0	5	13.0	7.5
CN 502-32	32	46	48	42	48	6.5	42.5	30.5	12.0	2.0	5	13.0	8.0
CN 502-33	33	47	49	42	48	6.5	42.5	30.5	12.0	2.0	5	13.0	8.0
CN 502-35	35	49	51	44	50	6.5	42.5	30.5	12.0	2.0	5	13.0	8.0
CN 502-38	38	54	58	49	56	6.5	45.0	32.0	13.0	2.0	6	14.0	10.0
CN 502-40	40	56	60	51	58	6.5	45.0	32.0	13.0	2.0	6	14.0	10.0
CN 502-43	43	59	63	54	61	6.5	45.0	32.0	13.0	2.0	6	14.0	12.0
CN 502-45	45	61	65	56	63	6.5	45.0	32.0	13.0	2.0	6	14.0	12.0
CN 502-48	48	64	68	59	66	6.5	45.0	32.0	13.0	2.0	6	14.0	12.0
CN 502-50	50	66	70	62	70	6.5	47.5	34.0	13.5	2.5	6	14.5	12.0
CN 502-53	53	69	73	65	73	6.5	47.5	34.0	13.5	2.5	6	14.5	12.0
CN 502-55	55	71	75	67	75	6.5	47.5	34.0	13.5	2.5	6	14.5	12.0
CN 502-58	58	78	83	70	78	6.5	52.5	39.0	13.5	2.5	6	14.5	14.0
CN 502-60	60	80	85	72	80	6.5	52.5	39.0	13.5	2.5	6	14.5	14.0
CN 502-63	63	83	88	75	83	6.5	52.5	39.0	13.5	2.5	6	14.5	14.0
CN 502-65	65	85	90	77	85	6.5	52.5	39.0	13.5	2.5	6	14.2	14.0
CN 502-68	68	88	93	81	90	6.5	52.5	39.0	13.5	2.5	7	14.2	14.0
CN 502-70	70	89	95	83	92	6.5	60.0	45.5	14.5	2.5	7	15.2	14.0
CN 502-75	75	96	104	88	97	6.5	60.0	45.5	14.5	2.5	7	15.2	14.0
CN 502-80	80	104	109	95	105	6.5	60.0	45.0	15.0	3.0	7	15.7	14.0
CN 502-85	85	108	114	100	110		60.0	45.0	15.0	3.0	7	15.7	
CN 502-90	90	114	119	105	115		65.0	50.0	15.0	3.0	7	15.7	
CN 502-95	95	118	124	110	120		65.0	50.0	15.0	3.0	7	15.7	
CN 502-100	100	124	129	115	125		65.0	50.0	15.0	3.0	7	15.7	