

结构特点 Design features

- 内装、单端面、多弹簧、平衡型、传动套传动结构，任意旋向，压力均匀，结构紧凑，安装方便。
- 安装尺寸符合ISO3069、DIN24960和GB6556标准。
- 橡胶O形圈结构，推进型密封；
- 外形尺寸及安装尺寸与59B相同，成套密封可互换。
- Internally mounted, single face, multi-spring, balanced structure and driven by brace ear and claw transmission, any rotation direction, compact construction, it can be mounted conveniently.
- Conform to the standard of ISO3069, DIN24960 and GB6556.
- O-ring pusher type seal.
- The shape and installation size is identical to 59B.

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: B、U1、U12、Q2、Q22
- 静止环 Stationary Ring: U1、Q2、V1
- 辅助密封 Auxiliary Seal: P、E、V、M1
- 弹簧及其他结构件材料 Spring and Other Parts: F、G



适用范围 Operating limits


- 压力 Pressure: ≤6.2MPa
- 温度 Temperature: -40~150℃
- 线速度 Speeds: ≤25m/sec

用途 Applications

用于化工、石油化工、炼油、制冷、制药、造纸、给排水、污水处理等工业的泵类、反应釜、压缩机等类似的旋转轴密封。Used in all types of rotating equipment, pumps, mixers, agitators and compressors, to suit industries such as general chemical, oil refining, petrochemical, pharmaceutical, food processing, pulp and paper, and waste water treatment.

介质 Medium

油类、水、盐、非结晶性溶剂、有机溶剂及其它弱腐蚀性溶液。Oil, water, salt, noncrystalline agent, organic solvents and other weak corrosive fluid.

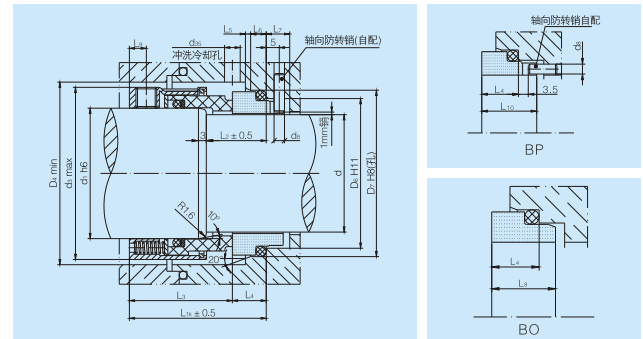

型号 Model	d	d1	d3	D4	D6	D7	d8	d35	L1k	L2	L3	L4	L5	L6	L7	L8	L9	L10
CN 58B-14	14	18	32	34	21	25	2	6.5	42.5	18	30.5	12.0	1.5	4	8.5	12.5	4.0	18.0
CN 58B-16	16	20	34	36	23	27	2	6.5	42.5	18	30.5	12.0	1.5	4	8.5	12.5	4.0	18.0
CN 58B-18	18	22	36	38	27	33	3	6.5	45.0	20	31.5	13.5	2.0	5	9.0	14.5	5.0	20.0
CN 58B-20	20	24	38	40	29	35	3	6.5	45.0	20	31.5	13.5	2.0	5	9.0	14.5	5.0	20.0
CN 58B-22	22	26	40	42	31	37	3	6.5	45.0	20	31.5	13.5	2.0	5	9.0	14.5	5.0	20.0
CN 58B-24	24	28	42	44	33	39	3	6.5	47.5	20	34.2	13.3	2.0	5	9.0	14.5	5.0	19.8
CN 58B-25	25	30	44	46	34	40	3	6.5	47.5	20	34.5	13.0	2.0	5	9.0	14.0	5.0	19.5
CN 58B-28	28	33	47	49	37	43	3	6.5	50.0	20	37.5	12.5	2.0	5	9.0	13.5	7.5	19.0
CN 58B-30	30	35	49	51	39	45	3	6.5	50.0	20	38.0	12.0	2.0	5	9.0	13.0	7.5	18.5
CN 58B-32	32	38	54	58	42	48	3	6.5	50.0	20	38.0	12.0	2.0	5	9.0	13.0	7.5	18.5
CN 58B-33	33	38	54	58	42	48	3	6.5	50.0	20	38.0	12.0	2.0	5	9.0	13.0	6.5	18.5
CN 58B-35	35	40	56	60	44	50	3	6.5	50.0	20	38.0	12.0	2.0	5	9.0	13.0	6.5	18.5
CN 58B-38	38	43	59	63	49	56	4	6.5	52.5	23	39.5	13.0	2.0	6	9.0	14.0	8.0	19.5
CN 58B-40	40	45	61	65	51	58	4	6.5	52.5	23	39.5	13.0	2.0	6	9.0	14.0	8.0	19.5
CN 58B-43	43	48	64	68	54	61	4	6.5	52.5	23	39.5	13.0	2.0	6	9.0	14.0	8.0	19.5
CN 58B-45	45	50	66	70	56	63	4	6.5	52.5	23	39.5	13.0	2.0	6	9.0	14.0	8.0	19.5
CN 58B-48	48	53	69	73	59	66	4	6.5	52.5	23	39.5	13.0	2.0	6	9.0	14.0	5.5	19.5
CN 58B-50	50	55	71	75	62	70	4	6.5	57.5	25	44.0	13.5	2.5	6	9.0	14.5	6.5	20.0
CN 58B-53	53	58	78	83	65	73	4	6.5	57.5	25	44.0	13.5	2.5	6	9.0	14.5	5.5	20.0
CN 58B-55	55	60	80	85	67	75	4	6.5	57.5	25	44.0	13.5	2.5	6	9.0	14.5	5.5	20.0
CN 58B-58	58	63	83	88	70	78	4	6.5	62.5	25	49.0	13.5	2.5	6	9.0	14.5	7.5	20.0
CN 58B-60	60	65	85	90	72	80	4	6.5	62.5	25	49.0	13.5	2.5	6	9.0	14.5	7.5	20.0
CN 58B-63	63	68	88	93	75	83	4	6.5	62.5	25	49.0	13.5	2.5	6	9.0	14.5	7.5	20.0
CN 58B-65	65	70	90	95	77	85	4	6.5	62.5	25	49.0	13.5	2.5	6	9.0	14.2	7.5	20.0
CN 58B-70	70	75	95	104	83	92	4	6.5	70.0	28	55.5	14.5	2.5	7	9.0	15.2	7.5	21.0
CN 58B-75	75	80	104	109	88	97	4	6.5	70.0	28	55.5	14.5	2.5	7	9.0	15.2	7.8	21.0
CN 58B-80	80	85	109	114	95	105	4	9.5	70.0	28	55.0	15.0	3.0	7	9.0	15.7	7.8	21.5
CN 58B-85	85	90	114	119	100	110	4	9.5	75.0	28	60.0	15.0	3.0	7	9.0	15.7	7.8	21.5
CN 58B-90	90	95	119	124	105	115	4	9.5	75.0	28	60.0	15.0	3.0	7	9.0	15.7	7.8	21.5
CN 58B-95	95	100	124	129	110	120	4	9.5	75.0	28	60.0	15.0	3.0	7	9.0	15.7	7.8	21.5
CN 58B-100	100	105	129	134	115	125	4	9.5	75.0	28	60.0	15.0	3.0	7	9.0	15.7	7.8	21.5