


## 结构特点 Design features

- 内装、单端面、波形弹簧、平衡型、拨叉传动结构，任意旋向，弹性元件不与介质接触，抗阻塞能力强。
- 安装尺寸符合ISO3069、DIN24960和GB6556标准。
- Internally mounted, single face, with Super-Sinus spring, balanced structure, by means of shifting fork spring no-touch to medium, has a stronger antiblocking condition.
- Conform to the standard of Iso3069、DIN24960 and GB6556

## 材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: A、B、U12、U22、Q12、Q22
- 静止环 Stationary Ring: U1、U2、Q2、Q22、V1
- 辅助密封 Auxiliary Seal: P、E、V、M1
- 弹簧及其他结构件材料 Spring and Other Parts: F、G、Y

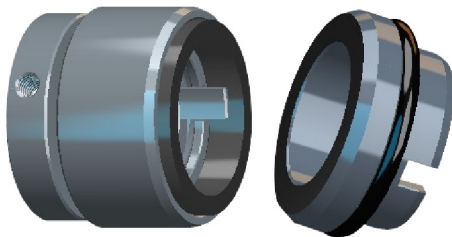

## 适用范围 Operating limits


- 压力 Pressure: 真空 Vacuum ~2.5MPa
- 温度 Temperature: -40~200°C
- 线速度 Speeds: ≤ 20m/sec
- 粘度 Viscosity: ≤ 1.0Pa.s(1000cp) 软对硬(Soft VS Hard)  
≤ 3.5Pa.s(3500cp) 硬对硬(Hard VS Hard)

## 用途 Applications

用于造纸、制糖、给排水、污水处理等工业的泵类的旋转轴密封。  
Used in all of rotating equipment, pumps, to suit industries such as papermaking, sugar-making industry, water and sewage water.

## 介质 Medium

含固体颗粒杂质、高粘度介质及其它弱腐蚀性溶液。  
Solid grains medium, high viscosity medium and other weak corrosive fluid.

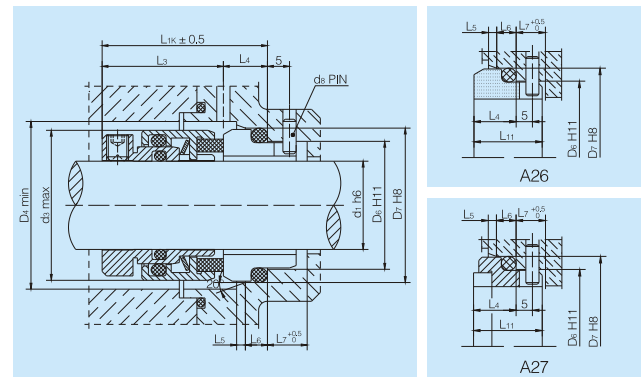

型号 Model	d1	d3	D4	D6	D7	d8	L1k	L3	L4	L5	L6	L7	L11
CN BT-18	18	32	34	27	33	3	37.5	27.5	10.0	2.0	5	9	16.5
CN BT-20	20	34	36	29	35	3	37.5	27.5	10.0	2.0	5	9	16.5
CN BT-22	22	36	38	31	37	3	37.5	27.5	10.0	2.0	5	9	16.5
CN BT-24	24	38	40	33	39	3	40.0	30.0	10.0	2.0	5	9	16.5
CN BT-25	25	39	41	34	40	3	40.0	30.0	10.0	2.0	5	9	16.5
CN BT-28	28	42	44	37	43	3	42.5	32.5	10.0	2.0	5	9	16.5
CN BT-30	30	44	46	39	45	3	42.5	32.5	10.0	2.0	5	9	16.5
CN BT-32	32	46	48	42	48	3	42.5	32.5	10.0	2.0	5	9	16.5
CN BT-33	33	47	49	42	48	3	42.5	32.5	10.0	2.0	5	9	16.5
CN BT-35	35	49	51	44	50	3	42.5	32.5	10.0	2.0	5	9	16.5
CN BT-38	38	54	58	49	56	4	45.0	34.0	11.0	2.0	6	9	17.5
CN BT-40	40	56	60	51	58	4	45.0	34.0	11.0	2.0	6	9	17.5
CN BT-43	43	59	63	54	61	4	45.0	34.0	11.0	2.0	6	9	17.5
CN BT-45	45	61	65	56	63	4	45.0	34.0	11.0	2.0	6	9	17.5
CN BT-48	48	64	68	59	66	4	45.0	34.0	11.0	2.0	6	9	17.5
CN BT-50	50	66	70	62	70	4	47.5	34.5	13.0	2.5	6	9	19.5
CN BT-53	53	69	73	65	73	4	47.5	34.5	13.0	2.5	6	9	19.5
CN BT-55	55	71	75	67	75	4	47.5	34.5	13.0	2.5	6	9	19.5
CN BT-58	58	78	83	70	78	4	52.5	39.5	13.0	2.5	6	9	19.5
CN BT-60	60	80	85	72	80	4	52.5	39.5	13.0	2.5	6	9	19.5
CN BT-63	63	83	88	75	83	4	52.5	39.5	13.0	2.5	6	9	19.5
CN BT-65	65	85	90	77	85	4	52.5	39.5	13.0	2.5	6	9	19.5
CN BT-68	68	88	93	81	90	4	52.5	37.5	15.0	2.5	7	9	21.5
CN BT-70	70	90	95	83	92	4	60.0	45.0	15.0	2.5	7	9	21.5
CN BT-75	75	95	104	88	97	4	60.0	45.0	15.0	2.5	7	9	21.5
CN BT-80	80	104	109	95	105	4	60.0	44.5	15.5	3.0	7	9	22.0
CN BT-85	85	109	114	100	110	4	60.0	44.5	15.5	3.0	7	9	22.0
CN BT-90	90	114	119	105	115	4	65.0	49.5	15.5	3.0	7	9	22.0
CN BT-95	95	119	124	110	120	4	65.0	49.5	15.5	3.0	7	9	22.0
CN BT-100	100	124	129	115	125	4	65.0	49.5	15.5	3.0	7	9	22.0