

结构特点 Design features

- 单端面、单弹簧、非平衡型、橡胶波纹管结构;
- 非推进型橡胶波纹管结构, 密封性可靠。
- 安装尺寸符合ISO30369、DIN24960和GB6556标准。
- Single face, single spring, unbalanced, rubber bellows structure.
- Non-pusher elastomeric bellows seal.
- The installation dimensions conform to the standard of ISO30369, DIN24960 and GB6556.

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: B、Q1、Q2、U1、U2
- 静止环 Stationary Ring: Q1、Q2、U1、U2、V1
- 辅助密封 Auxiliary Seal: P、E、V
- 弹簧及其他结构件材料 Spring and Other Parts: F、G



适用范围 Operating limits


- 压力 Pressure: ≤ 1.4MPa
- 温度 Temperature: -20~150℃
- 线速度 Speeds: ≤ 15m/sec

用途 Applications

适用于泵类、搅拌机、压缩机和其它旋转轴设备。
Used in all types of rotating equipment, pumps, mixers, agitators and compressors.

介质 Medium

油类、水及其它弱腐蚀性溶液。
Oil, water and other weak corrosive fluid.

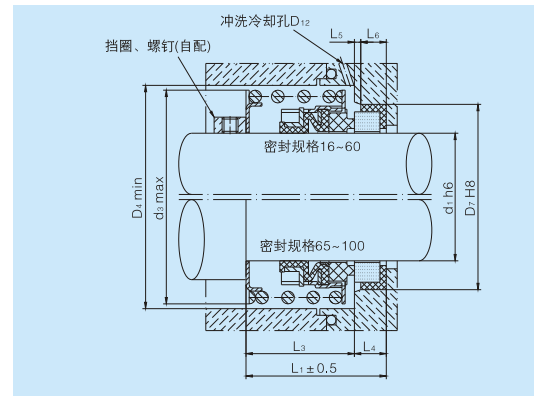

CN K3(公制)

型号 Model	d1	d3	D4	D7	D12	L1	L3	L4	L5	L6
CN K3-16	16	34.0	37	30	5	33	25	8	1.5	6
CN K3-18	18	36.8	40	32	5	33	25	8	2.0	6
CN K3-20	20	38.8	42	34	5	33	25	8	2.0	6
CN K3-22	22	41.5	45	36	5	33	25	8	2.0	6
CN K3-25	25	44.8	48	39	5	34	26	8	2.0	6
CN K3-28	28	48.5	52	43	5	34	26	8	2.0	6
CN K3-30	30	52.0	55	48	5	34	26	8	2.0	7
CN K3-35	35	57.0	60	53	5	40	30	10	2.0	8
CN K3-40	40	67.0	70	58	5	44	34	10	2.0	8
CN K3-45	45	73.0	76	63	5	46	36	10	2.0	8
CN K3-50	50	79.0	81	68	8	51	41	10	2.5	8
CN K3-55	55	84.0	87	73	8	53	41	12	2.5	10
CN K3-60	60	90.0	95	79	8	53	41	12	2.5	10
CN K3-65	65	98.5	104	86	8	61	49	12	2.5	10
CN K3-70	70	103.5	109	91	8	64	52	12	2.5	10
CN K3-75	75	110.5	116	96	8	64	52	12	2.5	10
CN K3-80	80	120.0	125	105	11	70	56	14	3.0	12
CN K3-85	85	125.0	130	110	11	70	56	14	3.0	12
CN K3-90	90	132.0	137	115	11	70	56	14	3.0	12
CN K3-95	95	137.0	142	120	11	70	56	14	3.0	12
CN K3-100	100	144.0	149	125	11	76	62	14	3.0	12

CN K3(英制)

型号 Model	d1	d3	D4	D7	D12	L1	L3	L4	L5	L6
CN K3-3/8"	9.52	28.0	32	24.60	5	33.7	25	8.7	1.5	6
CN K3-1/2"	12.70	32.0	35	27.80	5	33.7	25	8.7	1.5	6
CN K3-5/8"	15.87	34.0	39	30.95	5	35.3	25	10.3	2.0	7
CN K3-3/4"	19.05	38.8	43	34.15	5	35.3	25	10.3	2.0	7
CN K3-7/8"	22.22	41.5	46	37.30	5	35.3	25	10.3	2.0	7
CN K3-1"	25.40	44.8	50	40.50	5	35.3	25	10.3	2.0	7
CN K3-1 1/8"	28.57	48.5	59	47.65	5	44.9	33	11.9	2.0	7
CN K3-1 1/4"	31.75	57.0	62	50.80	5	44.9	33	11.9	2.0	7
CN K3-1 3/8"	34.92	57.0	66	54.00	5	44.9	33	11.9	2.0	7
CN K3-1 1/2"	38.10	67.0	70	57.15	5	44.9	33	11.9	2.0	7
CN K3-1 5/8"	41.27	67.0	74	60.35	5	44.9	33	11.9	2.0	7
CN K3-1 3/4"	44.45	73.0	77	63.50	5	52.9	41	11.9	2.0	7
CN K3-1 7/8"	47.62	73.0	81	66.70	5	52.9	41	11.9	2.0	7
CN K3-2"	50.80	79.0	85	69.85	8	54.5	41	13.5	2.5	10
CN K3-2 1/8"	53.97	84.0	88	73.05	8	54.5	41	13.5	2.5	10
CN K3-2 1/4"	57.15	84.0	91	76.20	8	54.5	41	13.5	2.5	10
CN K3-2 3/8"	60.32	90.0	94	79.40	8	54.5	41	13.5	2.5	10
CN K3-2 1/2"	63.50	94.0	97	82.55	8	54.5	41	13.5	2.5	10