






结构特点 Design features

- 双端面、多弹簧、非平衡型、传动套传动结构，任意旋向，结构紧凑，安装方便。
- 安装尺寸符合欧洲标准 DIN24960；
- 橡胶O形圈结构，推进型密封；
- 静环可配G4、G6、G9、G13、BP和BO等。
- Double faces, with multiple spring, unbalanced structure and driven by brace ear and claw transmission, any rotation direction, it can be mounted conveniently.
- Conform to the standard of DIN24960.
- O-ring pusher type seal.
- Style"G4", "G6", "G9", "G13", "BP", "BO" seat ring can be used as mating ring of this rotary unit.

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: A、Q1、Q2
- 静止环 Stationary Ring: A、B、Q1、Q2
- 辅助密封 Auxiliary Seal: P、E、V、M1
- 弹簧及其他结构件材料 Spring and Other Parts: F、G

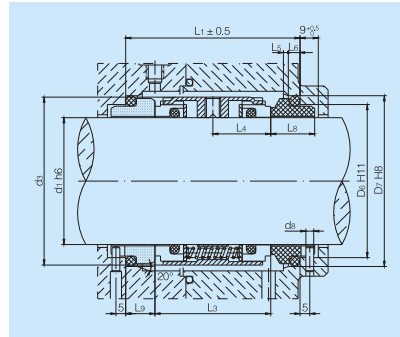

适用范围 Operating limits

- 压力 Pressure: ≤ 1.6MPa
- 温度 Temperature: -40~200℃
- 线速度 Speeds: ≤ 20m/sec
- 粘度 Viscosity: ≤ 1.0Pa.s(1000cp)软对硬(Soft VS Hard)
≤ 3.5Pa.s(3500cp)硬对硬(Hard VS Hard)

用途 Applications

用于化工、石油化工、炼油、制冷、制药、造纸、给排水、污水处理等工业的泵类、反应釜、压缩机等类似的旋转轴密封。 Used in all types of rotating equipment, pumps, mixers, agitators and compressors. to suit industries such as general chemical, oil refining, petrochemical, pharmaceutical, food processing, pulp and paper, and waste water treatment.

介质 Medium

酸、碱、盐、海水、汽体易燃易爆有毒介质。 Acids, alkali, salt, seawater, gases, flammable, and explosive toxic medium.

型号 Model	d1	d3	D6	D7	d8	D11	D12	L1	L3	L4	L5	L6	L8	L9	L10	L11	L12	L13	L14	L15	L16	L28
CN M74D-18	18	33	27.0	33.0	3	24.0	30.0	61.0	38.0	19.0	2.0	5	19.5	11.5	8.5	12.5	9.0	10.0	8.0	1.5	5.0	7.5
CN M74D-20	20	35	29.0	35.0	3	29.5	35.0	61.0	38.0	19.0	2.0	5	19.5	11.5	8.5	12.5	8.5	9.5	7.5	1.5	5.0	7.5
CN M74D-22	22	37	31.0	37.0	3	29.5	35.0	61.0	38.0	19.0	2.0	5	19.5	11.5	8.5	12.5	8.5	9.5	7.5	1.5	5.0	7.5
CN M74D-24	24	39	33.0	39.0	3	32.0	38.0	61.0	38.0	19.0	2.0	5	19.5	11.5	8.5	12.5	8.5	9.5	7.5	1.5	5.0	7.5
CN M74D-25	25	40	34.0	40.0	3	32.0	38.0	61.0	38.0	19.0	2.0	5	19.5	11.5	8.5	12.5	8.5	9.5	7.5	1.5	5.0	7.5
CN M74D-28	28	43	37.0	43.0	3	36.0	42.0	62.0	39.0	19.5	2.0	5	19.5	11.5	8.5	14.0	10.0	11.0	9.0	1.5	5.0	7.5
CN M74D-30	30	45	39.0	45.0	3	39.2	45.0	62.0	39.0	19.5	2.0	5	19.5	11.5	8.5	14.0	11.5	11.0	10.5	1.5	5.0	7.5
CN M74D-32	32	47	42.0	48.0	3	42.2	48.0	62.0	39.0	19.5	2.0	5	19.5	11.5	8.5	14.0	11.5	11.0	10.5	1.5	5.0	7.5
CN M74D-33	33	48	42.0	48.0	3	44.2	50.0	62.0	39.0	19.5	2.0	5	19.5	11.5	8.5	14.5	12.0	11.5	10.5	1.5	5.0	7.5
CN M74D-35	35	50	44.0	50.0	3	46.2	52.0	62.0	39.0	19.5	2.0	5	19.5	11.5	8.5	14.5	12.0	11.5	11.0	1.5	5.0	7.5
CN M74D-38	38	55	49.0	56.0	4	49.2	55.0	69.0	41.0	20.5	2.0	6	22.0	14.0	10.0	14.5	11.3	11.5	10.3	1.5	5.0	9.0
CN M74D-40	40	57	51.0	58.0	4	52.2	58.0	70.0	42.0	21.0	2.0	6	22.0	14.0	10.0	14.5	11.8	11.5	10.8	1.5	5.0	9.0
CN M74D-43	43	60	54.0	61.0	4	53.3	62.0	70.0	42.0	21.0	2.0	6	22.0	14.0	10.0	17.0	13.2	14.3	12.0	2.0	6.0	9.0
CN M74D-45	45	62	56.0	63.0	4	55.3	64.0	70.0	42.0	21.0	2.0	6	22.0	14.0	10.0	17.0	12.8	14.3	11.6	2.0	6.0	9.0
CN M74D-48	48	65	59.0	66.0	4	59.7	68.4	70.0	42.0	21.0	2.0	6	22.0	14.0	10.0	17.0	12.8	14.3	11.6	2.0	6.0	9.0
CN M74D-50	50	67	62.0	70.0	4	60.8	69.3	73.0	43.0	21.5	2.5	6	23.0	15.0	10.5	17.0	12.8	14.3	11.6	2.0	6.0	9.5
CN M74D-53	53	70	65.0	73.0	4	63.8	72.3	73.0	43.0	21.5	2.5	6	23.0	15.0	12.0	17.0	13.5	14.3	12.3	2.0	6.0	11.0
CN M74D-55	55	72	67.0	75.0	4	66.5	75.4	73.0	43.0	21.5	2.5	6	23.0	15.0	12.0	18.0	14.5	15.3	13.3	2.0	6.0	11.0
CN M74D-58	58	79	70.0	78.0	4	69.5	78.4	86.0	56.0	28.0	2.5	6	23.0	15.0	12.0	18.0	14.5	15.3	13.3	2.0	6.0	11.0
CN M74D-60	60	81	72.0	80.0	4	71.5	80.4	86.0	56.0	28.0	2.5	6	23.0	15.0	12.0	18.0	14.5	15.3	13.3	2.0	6.0	11.0
CN M74D-63	63	84	75.0	83.0	4	74.5	83.4	85.0	55.0	27.5	2.5	6	23.0	15.0	12.0	18.0	14.2	15.3	13.3	2.0	6.0	11.0
CN M74D-65	65	86	77.0	85.0	4	76.5	85.4	85.0	55.0	27.5	2.5	6	23.0	15.0	12.0	18.0	14.2	15.3	13.0	2.0	6.0	11.0
CN M74D-68	68	89	81.0	90.0	4	82.7	91.5	91.0	55.0	27.5	2.5	7	26.0	18.0	12.5	19.0	14.9	16.0	13.7	2.0	6.0	11.3
CN M74D-70	70	91	83.0	92.0	4	83.0	92.0	92.0	56.0	28.0	2.5	7	26.0	18.0	12.5	18.0	14.2	15.3	13.0	2.0	6.0	11.3
CN M74D-75	75	99	88.0	97.0	4	90.2	99.0	92.0	56.0	28.0	2.5	7	26.0	18.0	12.5	18.0	15.2	15.3	14.0	2.0	6.0	11.3
CN M74D-80	80	104	95.0	105.0	4	95.2	104.0	92.5	56.0	28.0	3.0	7	26.2	18.2	13.0	19.0	16.2	16.3	15.0	2.0	6.0	12.0
CN M74D-85	85	109	100.0	110.0	4	100.2	109.0	92.5	56.0	28.0	3.0	7	26.2	18.2	15.0	19.0	16.0	16.3	14.8	2.0	6.0	14.0
CN M74D-90	90	114	105.0	115.0	4	105.2	114.0	92.5	56.0	28.0	3.0	7	26.2	18.2	15.0	19.0	16.0	16.3	14.8	2.0	6.0	14.0
CN M74D-95	95	119	110.0	120.0	4	111.6	120.3	90.5	56.0	28.0	3.0	7	25.2	17.2	15.0	20.0	17.0	17.3	15.8	2.0	6.0	14.0
CN M74D-100	100	124	115.0	125.0	4	114.5	123.3	90.5	56.0	28.0	3.0	7	25.2	17.2	15.0	20.0	17.0	17.3	15.8	2.0	6.0	14.0