

结构特点 Design features

- 外装、单端面、金属波纹管、平衡型、旋转式密封；
- 螺钉传动结构，任意旋向，压力均匀，结构简单、紧凑，安装方便，泄漏点少，密封性能可靠；
- 优越的追随性和补偿能力，抗震能力强，所使用的材料广泛，环境适应能力强。
- Internally mounted, single face, metal bellows, balanced, rotary type seal.
- Driven by screws, any rotation direction, compact construction. It can be mounted conveniently.
- With superior seismic and compensation, material widely used adaptive capacity.

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: A、U22、Q22
- 静止环 Stationary Ring: U2、Q2
- 辅助密封 Auxiliary Seal: P、X、V、M1
- 波纹管 Bellows: G1、Y、M
- 其他结构件材料 Other Parts: F、G、G1、T4、M



适用范围 Operating limits


- 压力 Pressure: 真空(Vacuum)~2.0MPa
- 温度 Temperature: -40~200°C
- 线速度 Speeds: ≤25m/sec
- 粘度 Viscosity: ≤1.0Pa.s(1000cp)软对硬(Soft VS Hard)
≤3.5Pa.s(3500cp)硬对硬(Hard VS Hard)

用途 Applications

用于化工、石油化工、炼油、制冷、制药、造纸、给排水、污水处理等工业的泵类、反应釜、压缩机等类似的旋转轴密封。Used in all types of rotating equipment, pumps, mixers, agitators and compressors. To suit industries such as general chemical, oil refining, petrochemical, pharmaceutical, food processing, pulp and paper, and waste water treatment.

介质 Medium

油、水、盐、有机溶剂及其它弱腐蚀性溶液。
Oil, water, salt, organic solvents and other weak corrosive fluid.

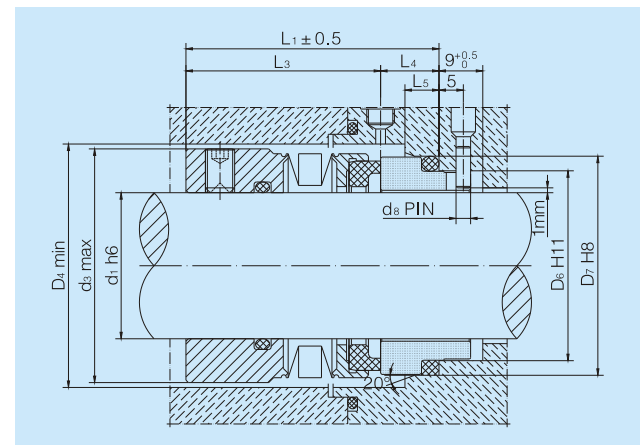

型号 Model	d1	d3	D4	D6	D7	d8	L1	L3	L4	L5
CN MB2-30	30	48	50	39	45	3	52	40	12	7
CN MB2-35	35	51	54	44	50	3	52	40	12	7
CN MB2-40	40	62	65	51	58	4	60	47	13	8
CN MB2-45	45	67	70	56	63	4	65	52	13	8
CN MB2-50	50	72	75	62	70	4	65.5	52	13.5	8.5
CN MB2-55	55	78	82	67	75	4	68.5	55	13.5	8.5
CN MB2-60	60	83	87	72	80	4	68.5	55	13.5	8.5
CN MB2-65	65	88	92	77	85	4	68.5	55	13.5	8.5
CN MB2-70	70	97	101	83	92	4	69.5	55	14.5	9.5
CN MB2-75	75	98	102	88	97	4	69.5	55	14.5	9.5
CN MB2-80	80	103	107	95	105	4	73	58	15	10
CN MB2-85	85	108	112	100	110	4	73	58	15	10
CN MB2-90	90	114.5	120	105	115	4	73	58	15	10
CN MB2-95	95	120	125	110	120	4	75	60	15	10
CN MB2-100	100	124	130	115	125	4	75	60	15	10