

结构特点 Design features

- 内装、单端面、单弹簧、非平衡型、紧定螺钉结合拨叉动结构，任意旋向，可承受高扭力驱动，能耐较大轴向位移；
- 静环可选配SA、SE任一形式。
- Internally mounted, single face, single spring, unbalanced structure and driven by screws and claw transmission, any rotation direction, high torque drive and have allow the shaft movement.
- Style"SA", "SE" seat ring can be used as mating ring of this rotary unit.

材料 Materials(to DIN24960)

- 旋转环 Rotary Ring: U12、U22、Q2、Q22
- 静止环 Stationary Ring: B、U12、U22、Q2、Q22
- 辅助密封 Auxiliary Seal: P、V、T1
- 弹簧及其他结构件材料 Spring and Other Parts: F、G

适用范围 Operating limits


- 压力 Pressure: 0~1.0MPa
- 温度 Temperature: -20~180°C(Rubber O-ring)
-40~230°C(PTFE V-Packing)
- 线速度 Speeds: ≤20m/sec

用途 Applications

用于造纸、制糖、给排水、污水处理等工业的泵类的旋转轴密封。
Used in all of rotating equipment, pumps, to suit industries such as papermaking, sugar-making industry, water and sewage water.

介质 Medium

含固体颗粒、高粘度介质及其它弱腐蚀性溶液。
Solid grains medium, high viscosity medium and other weak corrosive fluid.

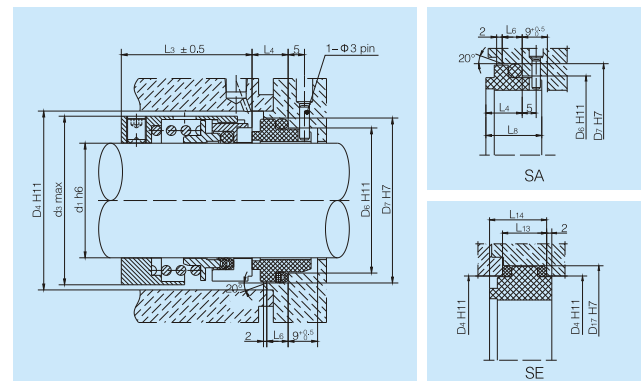

型号 Model	d1	d3	D4	D6	D7	D17	L3	L4	L6	L8	L13	L14	(L3+L4)	(L3+L14)
CN UMS001-25	25	39	41	34	40	47	35	13	5	20	18	23	48	58
CN UMS001-28	28	42	44	37	43	50	35	13	5	20	18	23	48	58
CN UMS001-30	30	44	46	39	45	52	35	13	5	20	18	23	48	58
CN UMS001-32	32	46	48	42	48	54	35	13	5	20	18	23	48	58
CN UMS001-35	35	49	51	44	50	57	35	13	5	20	18	23	48	58
CN UMS001-38	38	54	58	50	56	64	38	13	5	20	20	25	51	63
CN UMS001-40	40	56	60	52	58	66	38	13	5	20	20	25	51	63
CN UMS001-45	45	61	65	57	63	71	38	13	5	20	20	25	51	63
CN UMS001-50	50	66	70	62	68	76	39	13	5	20	20	25	52	64
CN UMS001-55	55	71	75	67	73	81	40	13	5	20	20	25	53	65
CN UMS001-60	60	78	85	72	81	91	43	16	7	23	22	28	59	71
CN UMS001-65	65	83	90	77	86	96	45	16	7	23	22	28	61	73
CN UMS001-70	70	90	95	83	92	101	45	16	7	23	24	30	61	75